




U5136-O-200S-FMG with series wired main & **K5400-520GR** kit

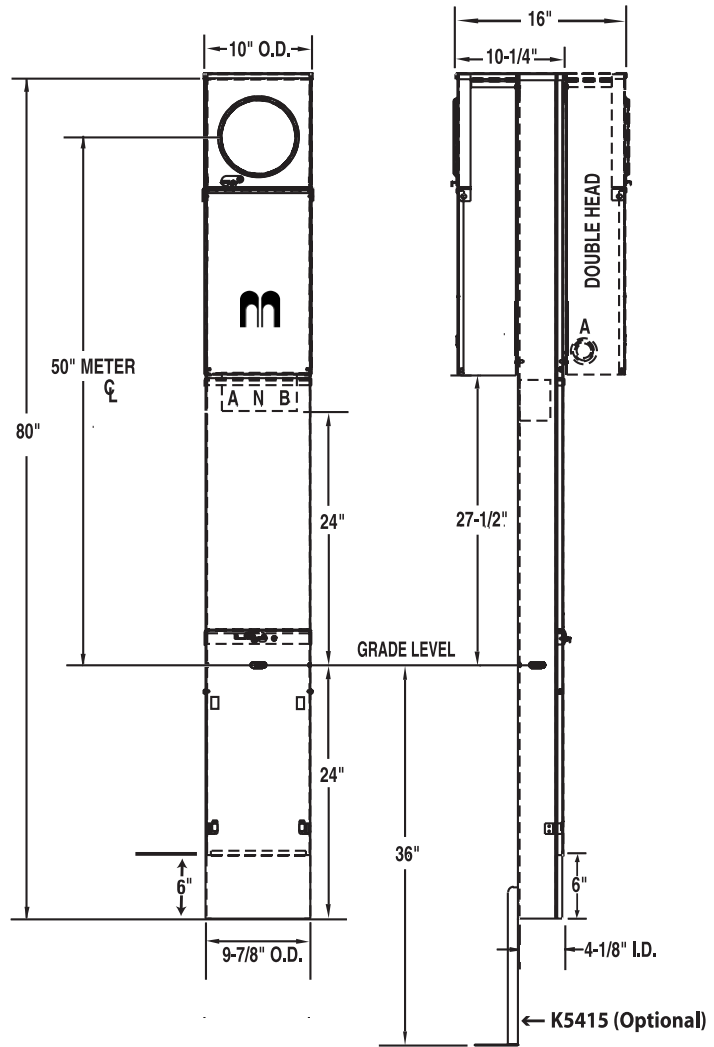

KO's	
A	= 1, 1-1/4, 1-1/2, 2
B	= 1/2, 3/4
C	= 1/4 SOLID

SPECIFICATIONS

- UL Listed File E90945 – conforms to Florida Meter Group requirements
- 200 amp maximum, 120/240 volt, single phase, three wire meter socket
- Ringless meter socket and stainless steel latch
- Short circuit withstand rating 22K AIC.
- Type 3R construction for durable outdoor use, one piece post – lockable and sealable
- Milbank grey polyester powder coat finish
- Wire terminations accept copper or aluminum conductors
- Line & Neutral: (2) #6-350 kcmil per phase
- Line Ground: (4) #14-1/0
- Load (CB): 2/0 to 300 kcmil per pole
- Load Neutral: (1) #6-350 kcmil
- Load Ground: (2) #14-1/0, (4) #14/6
- Milbank plug-in main circuit breaker. Available in 100, 125, 150 & 200 amp. Type UQFPH-M.
- Four-circuit plated copper interior accepts (2) 2-pole or (4) 1-pole standard plug-in type circuit breakers up to a total of 125 amps maximum. Acceptable manufacturers: Cutler-Hammer, GE or Siemens
- Factory or field installable receptacle bridge and receptacle / circuit breaker kits available. See Accessories.
- The **K5415** stabilizer foot must be installed to comply with FMG requirements.

